


INSTRUCTION MANUAL

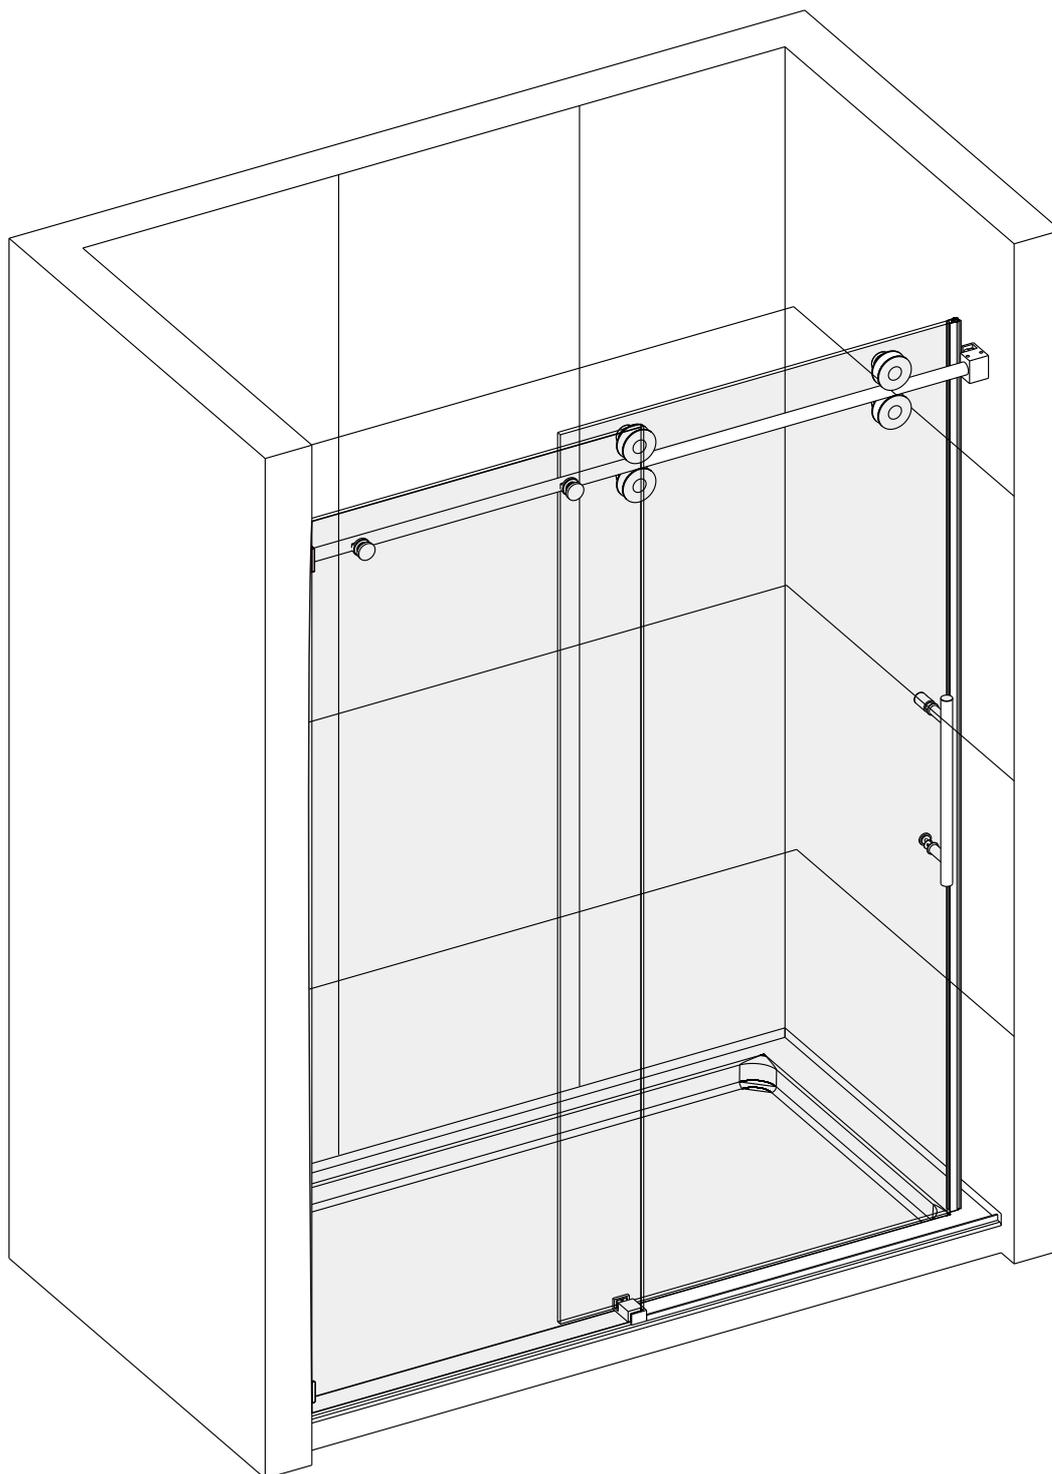

2 PEOPLE REQUIRED

***Please keep this manual and product code number for future reference
and for ordering replacement parts if necessary.***

GENERAL INSTRUCTIONS

- Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

INSTALLATION OVER CERAMIC TILES

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.



NOTICE

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR



- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.
An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and metal parts looking new.
- We recommend wiping the glass panels with a squeegee after each use.

TOOLS REQUIRED


 SPIRIT LEVEL	 POWER DRILL	 PENCIL	 SILICONE	 MALLET
 TAPE MEASURE	 SCREW DRIVER	 6mm&8mm(1/4" & 5/16") DRILL BITS	 HACKSAW	 SAFETY GLASSES

* Use a 6mm(1/4") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION

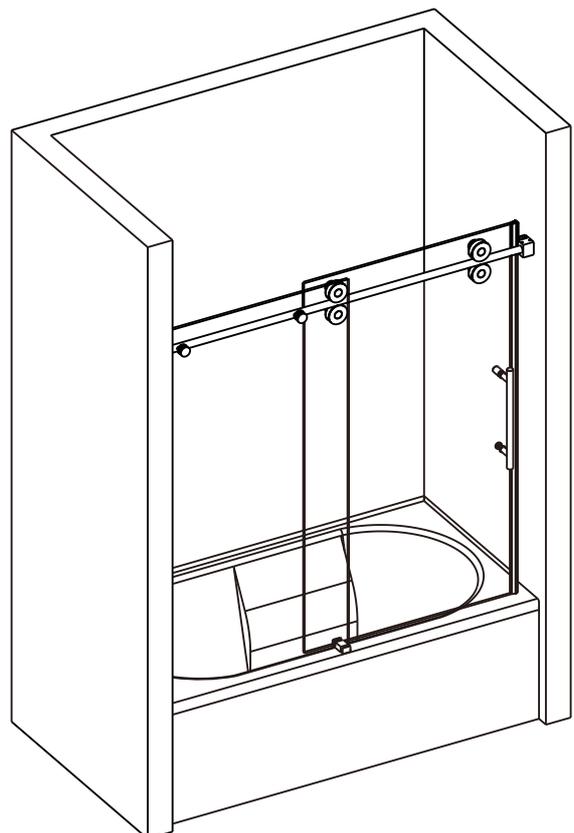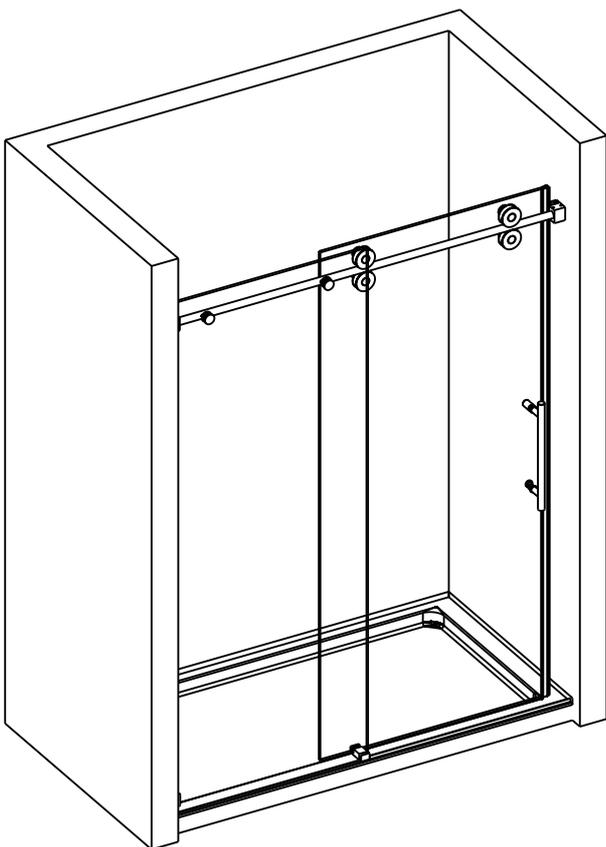




PARTS LISTING

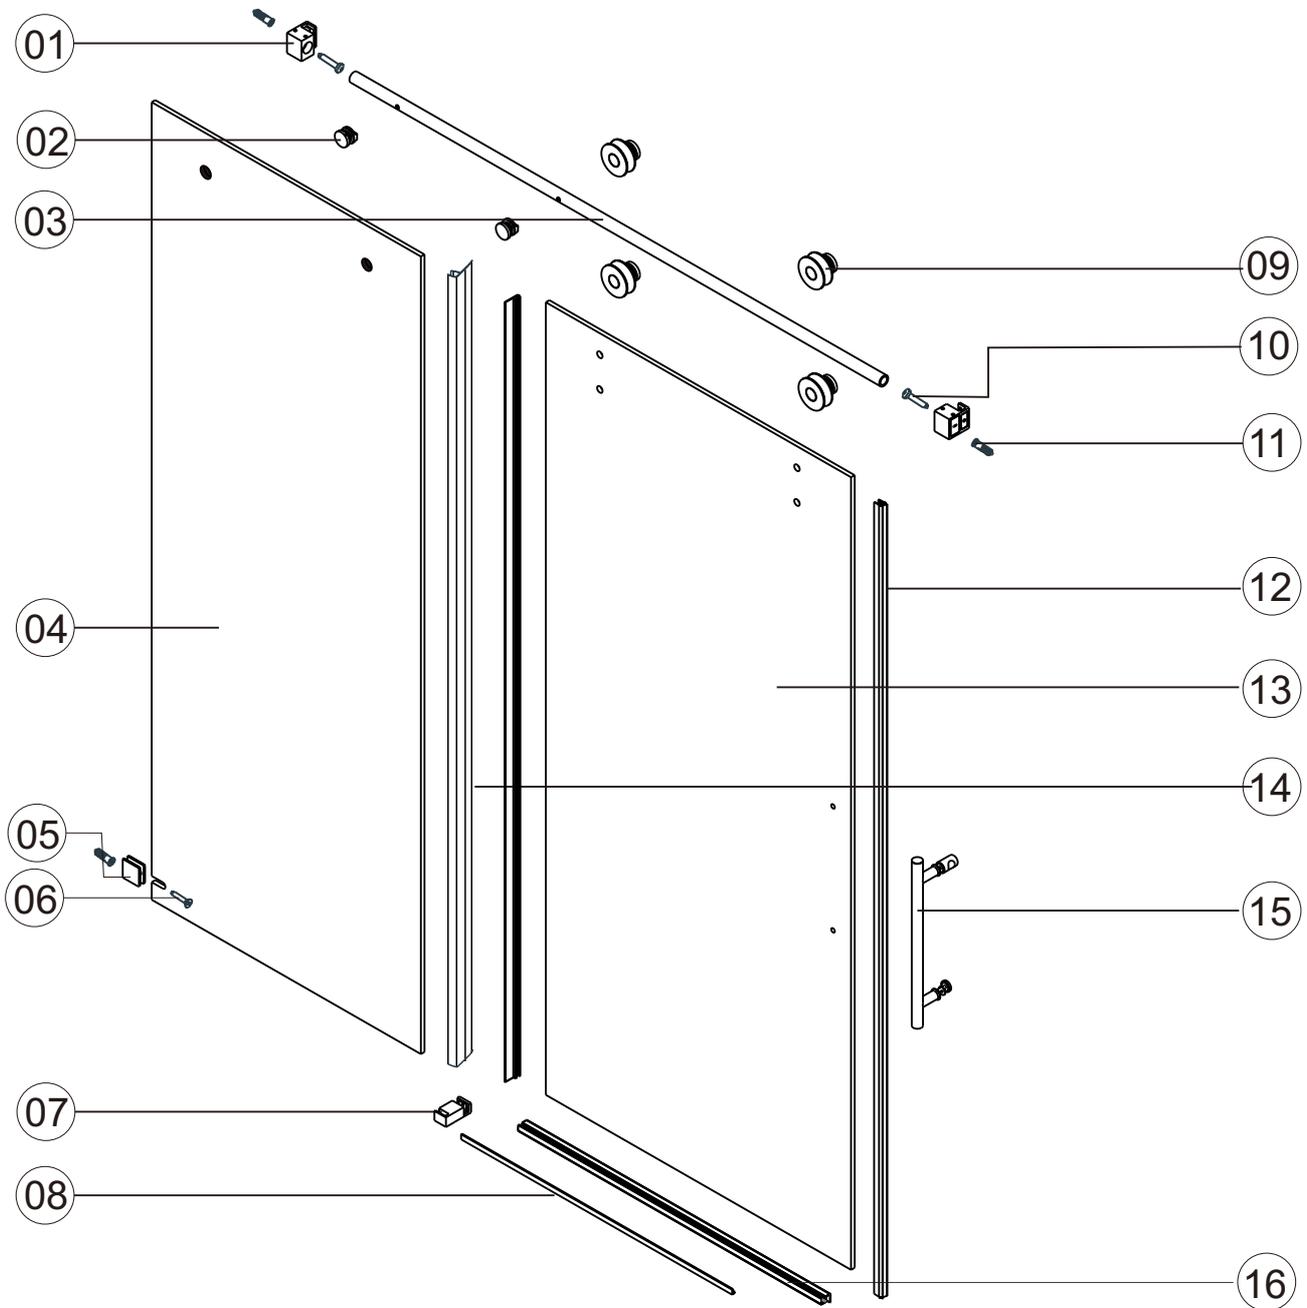


ITEM	PARTS	DIAGRAM	QTY
1	Guide rail bracket		2
2	Track holder for fixed panel		2
3	Rail		1
4	Fixed panel		1
5	Wall mount bracket		1
6	Screw St4x30		1
7	Floor guide		1
8	Anti-splash threshold		1

ITEM	PARTS	DIAGRAM	QTY
9	Ø70 Roller		4
10	Screw St5x40		2
11	Wall plugs		3
12	Door seal		1
13	Sliding door		1
14	Handle		1
15	Fixed panel seal		2
16	Door seal		1



1

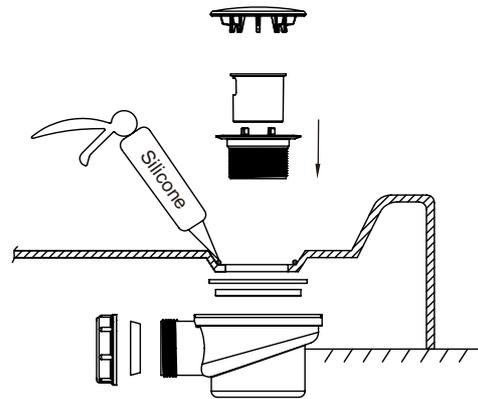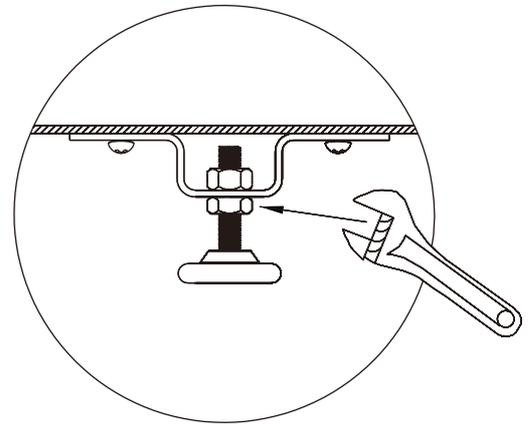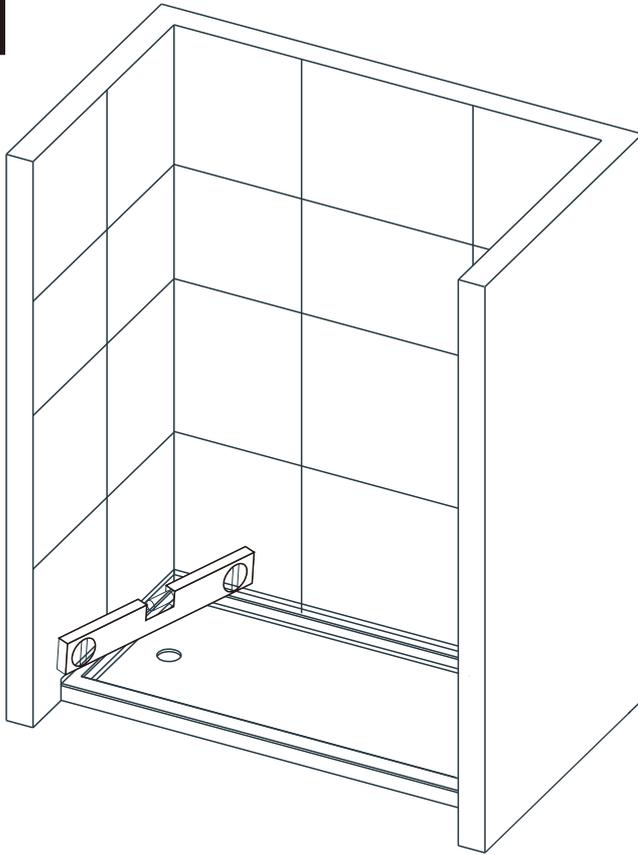


2

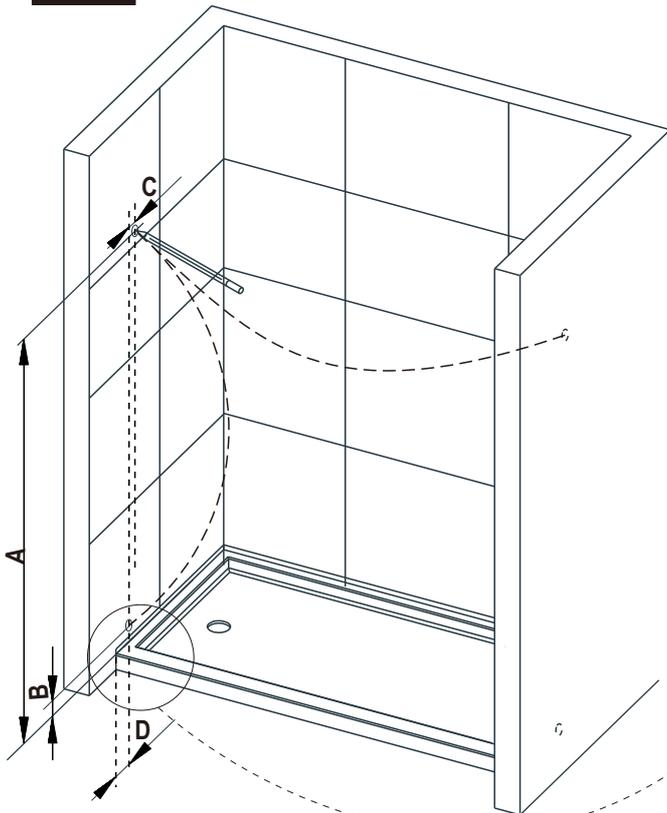


Product Height	A	B	C	D
60"(1524mm)	56 4/5"(1443mm)	3 15/16" (100mm)	1" (25.4mm)	min 5/8" (15mm)
66"(1676mm)	62 4/5"(1595mm)			
72"(1828mm)	68 4/5"(1747mm)			
75"(1905mm)	71 4/5"(1824mm)			
76"(1930mm)	72 4/5"(1849mm)			
78"(1981mm)	74 4/5"(1900mm)			
79"(2006mm)	75 4/5"(1925mm)			

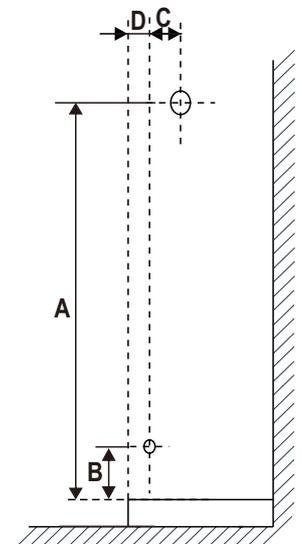


3

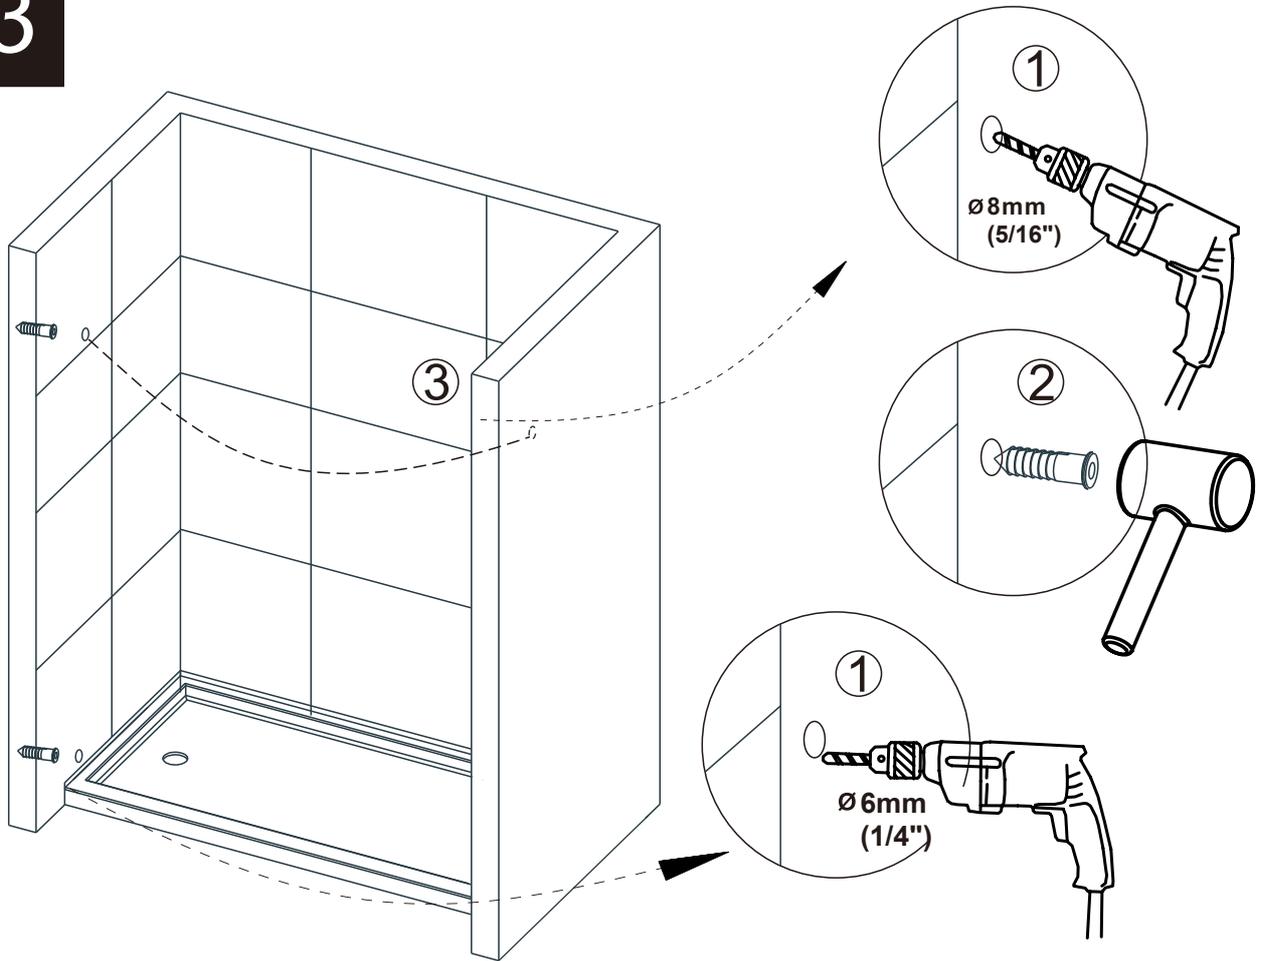


4

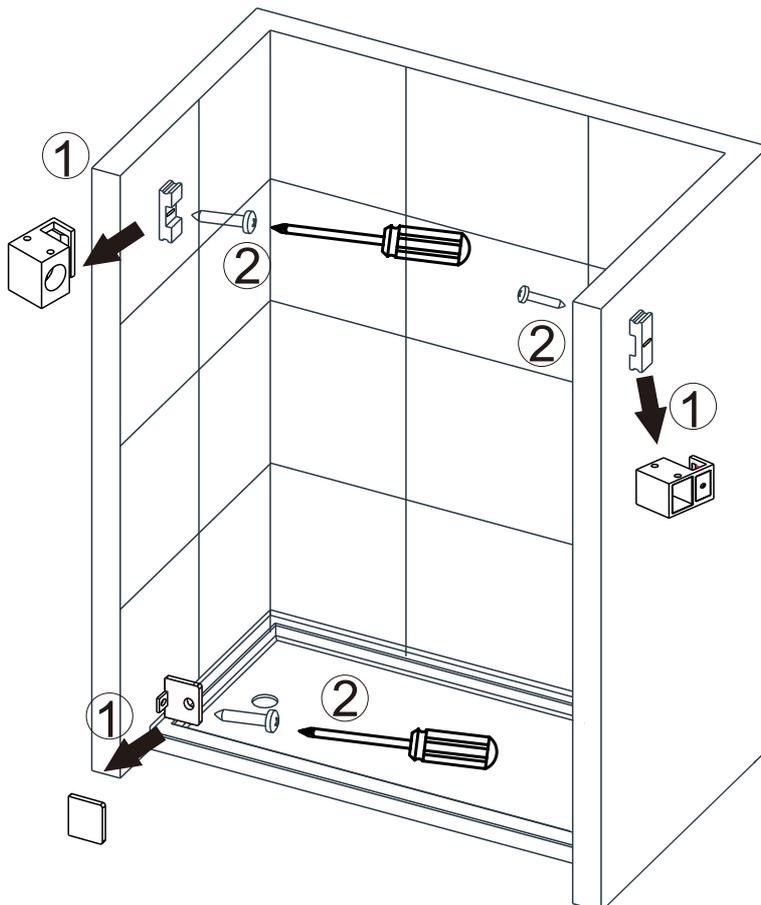

5

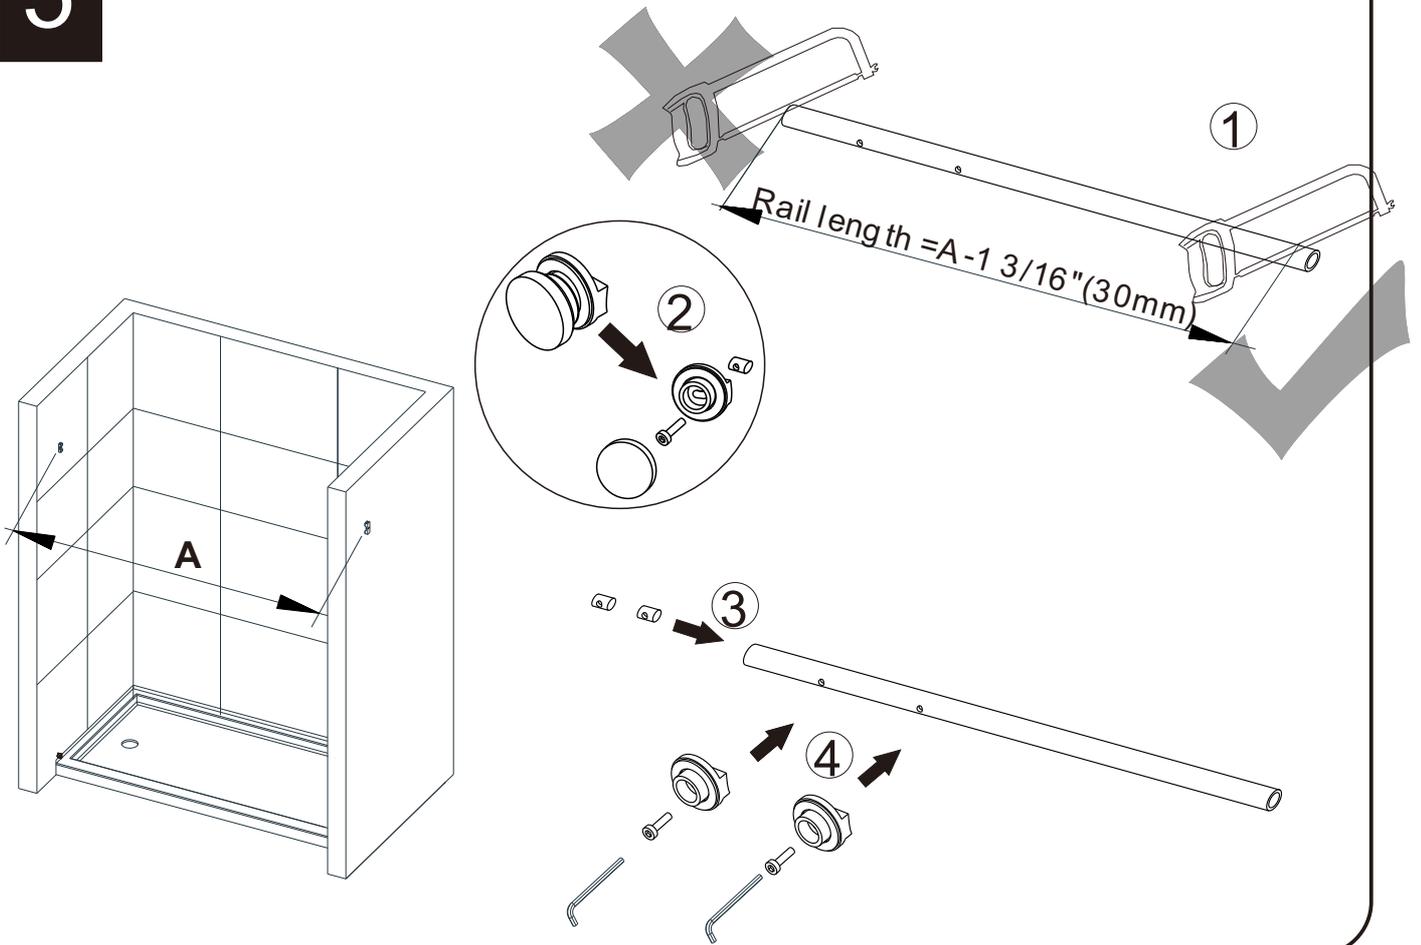




6

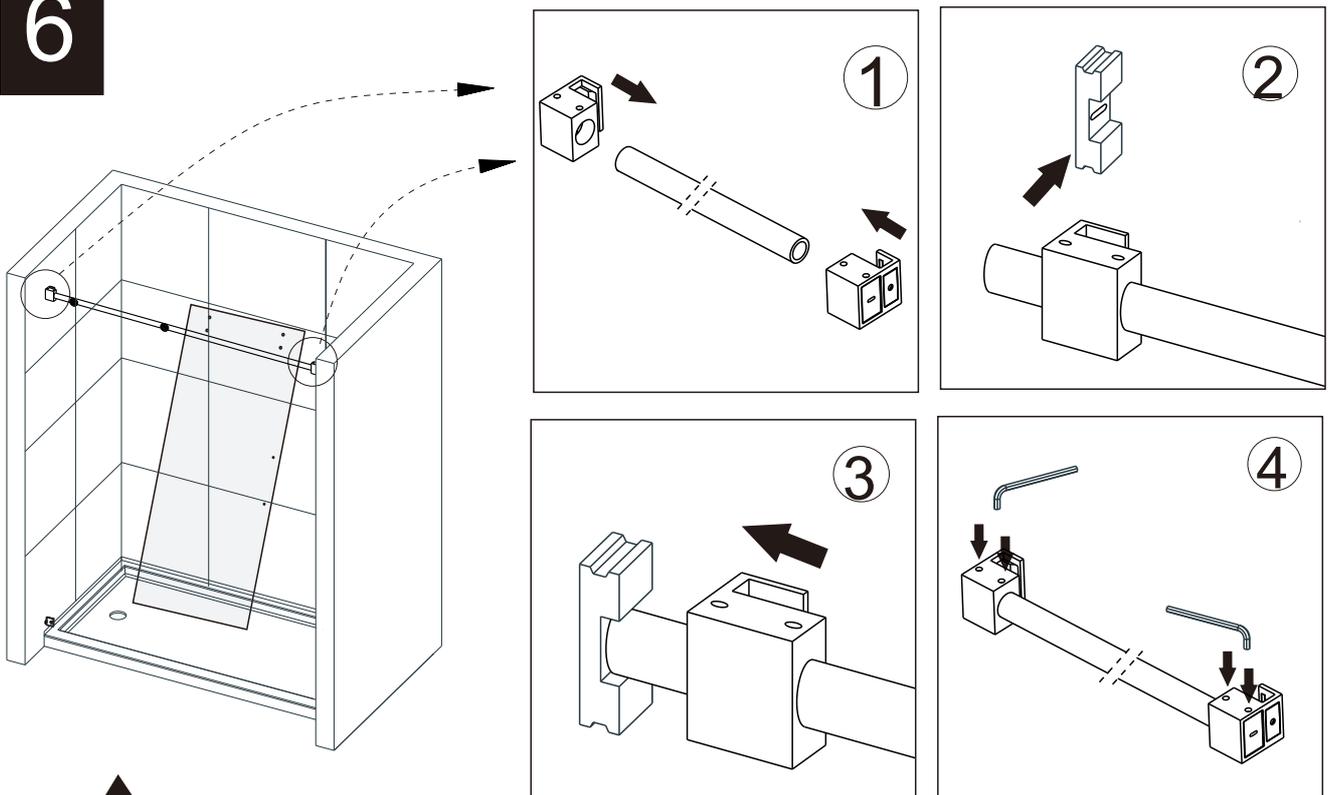






! Please put the door panel inside the shower base prior to the top rail installation !

7

 The glass side that treated with easy-cleaning should toward inside

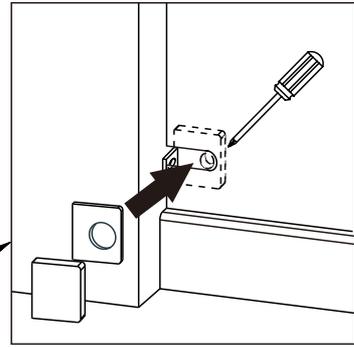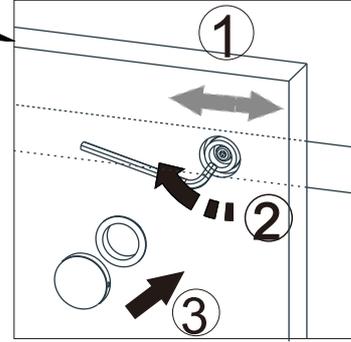
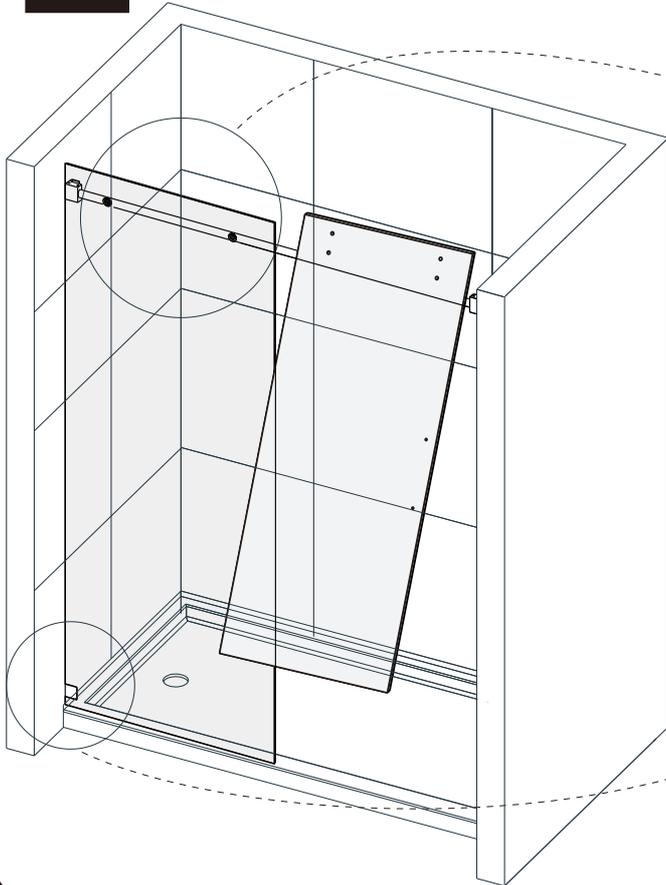


8

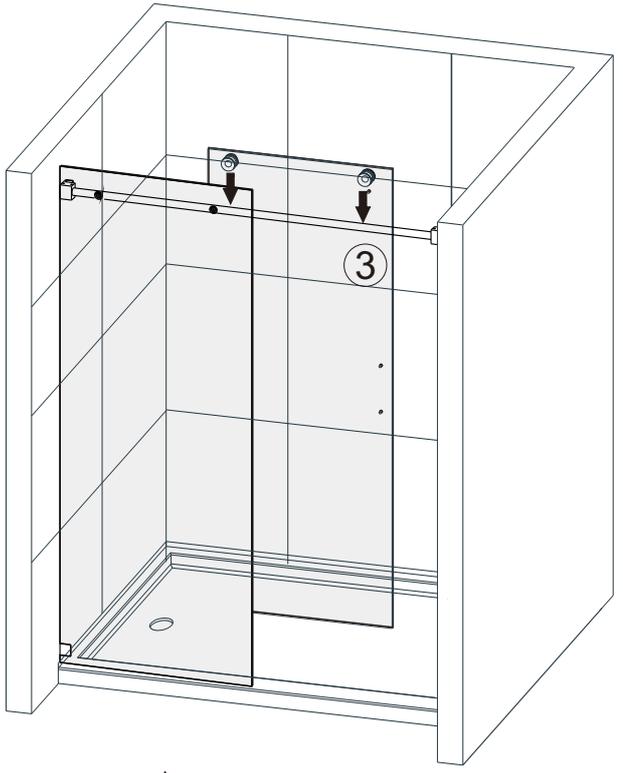

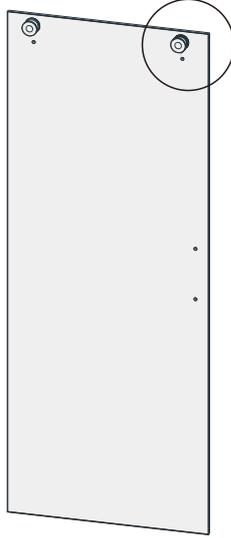


 The glass side that treated with easy-cleaning should toward inside


9

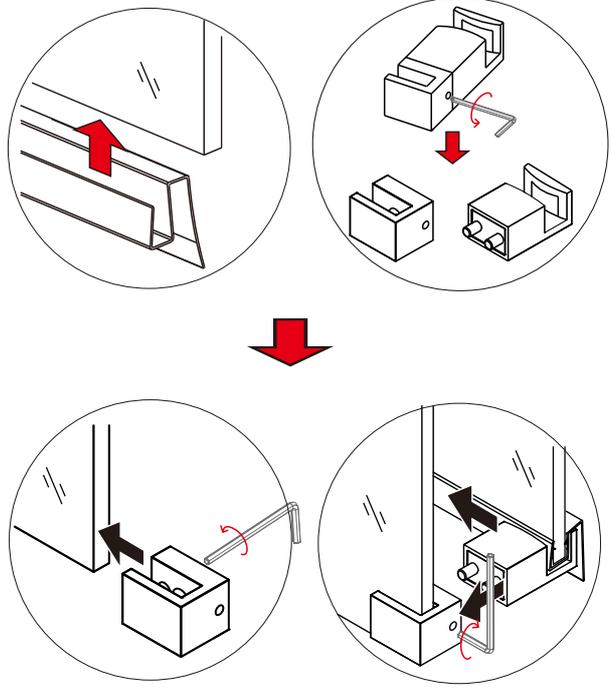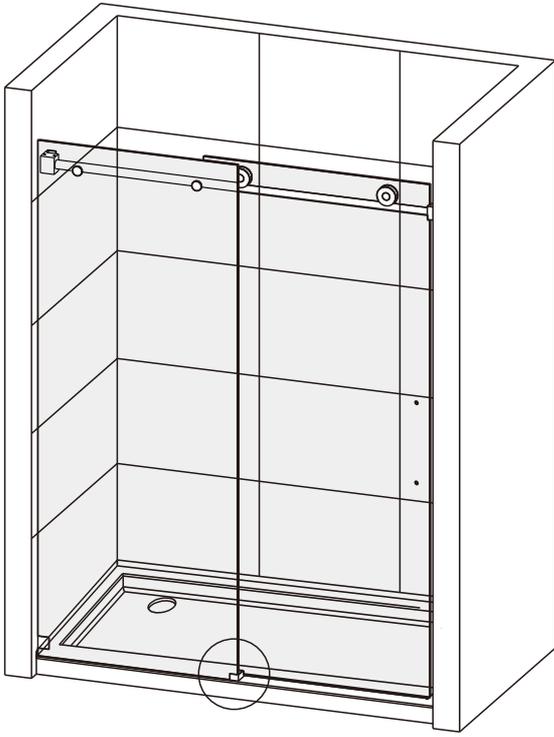


10

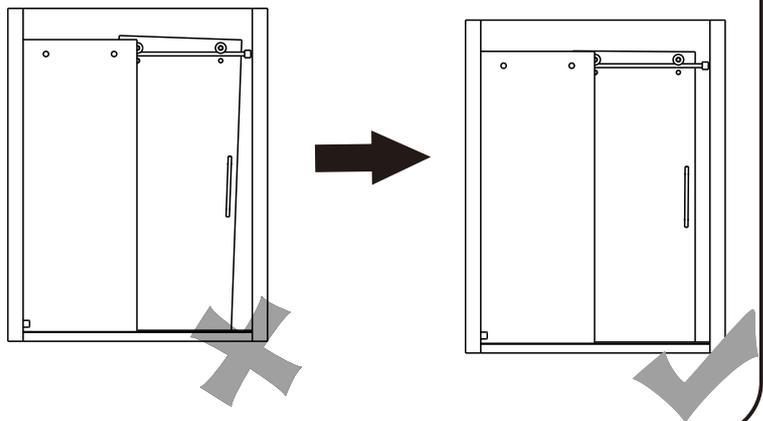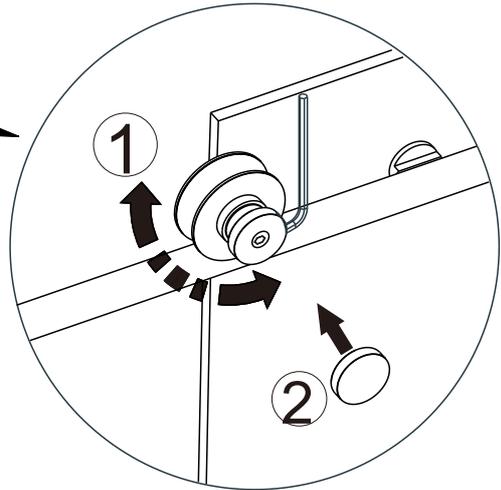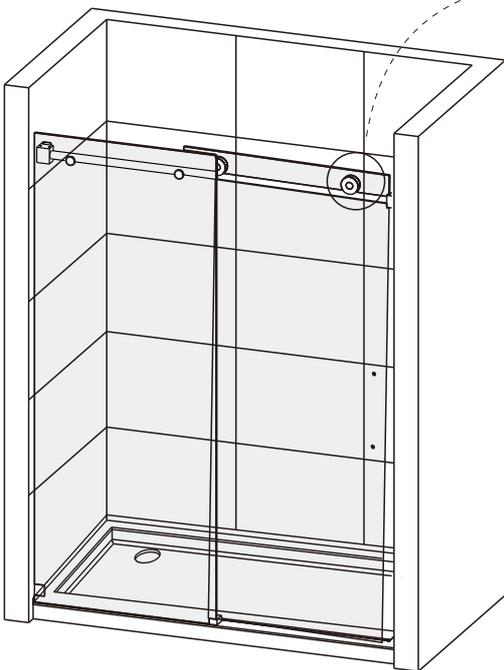


11

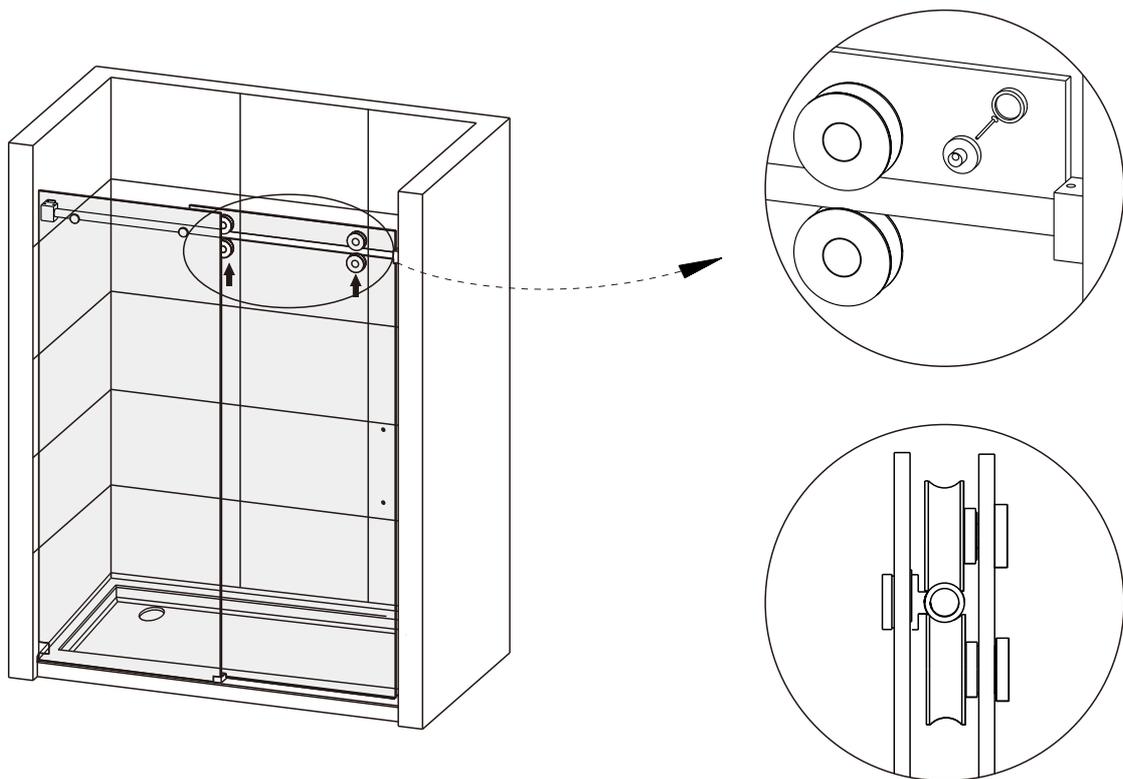


12

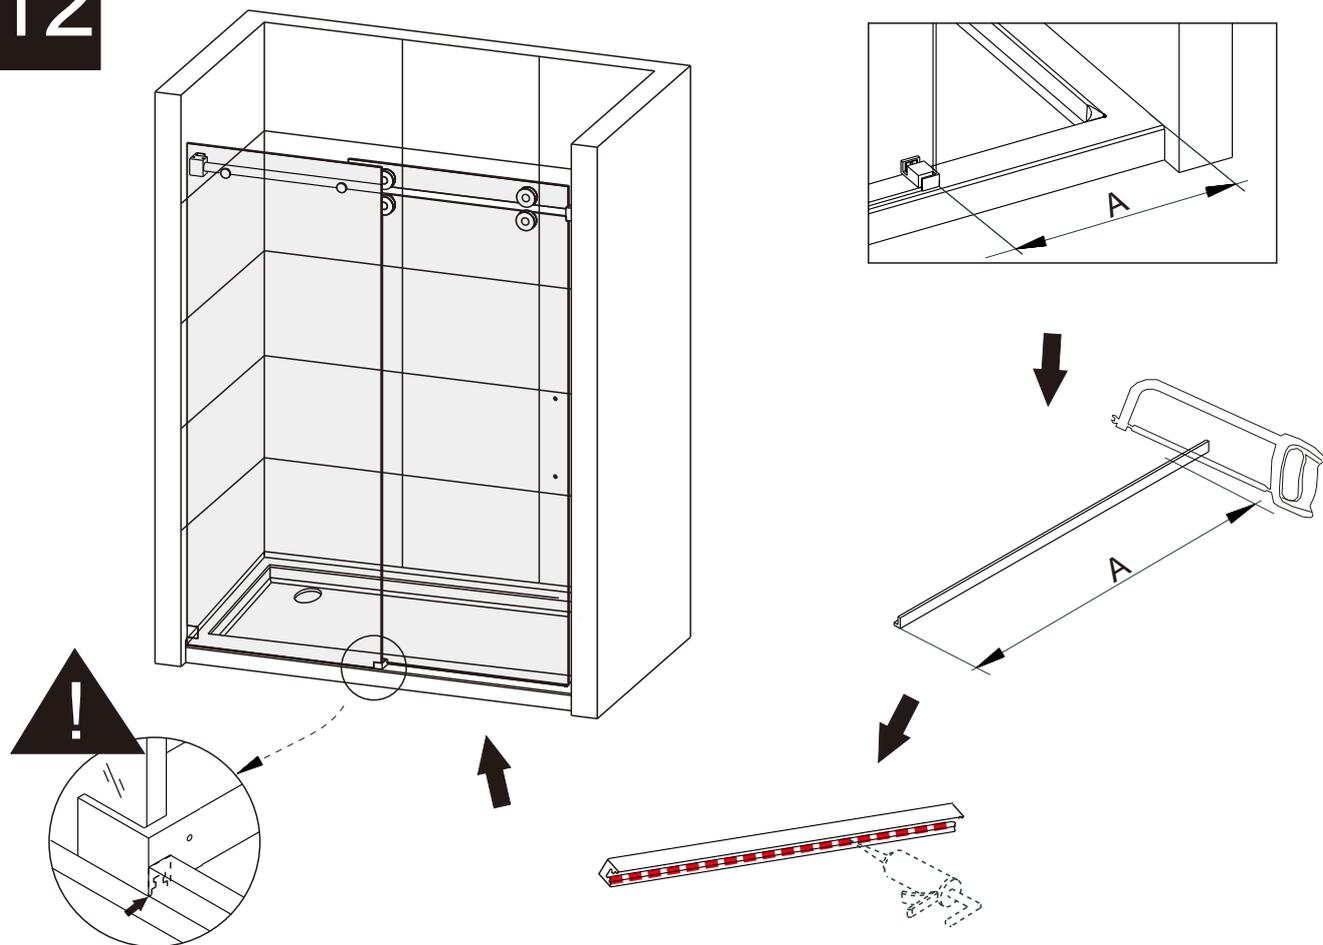

13

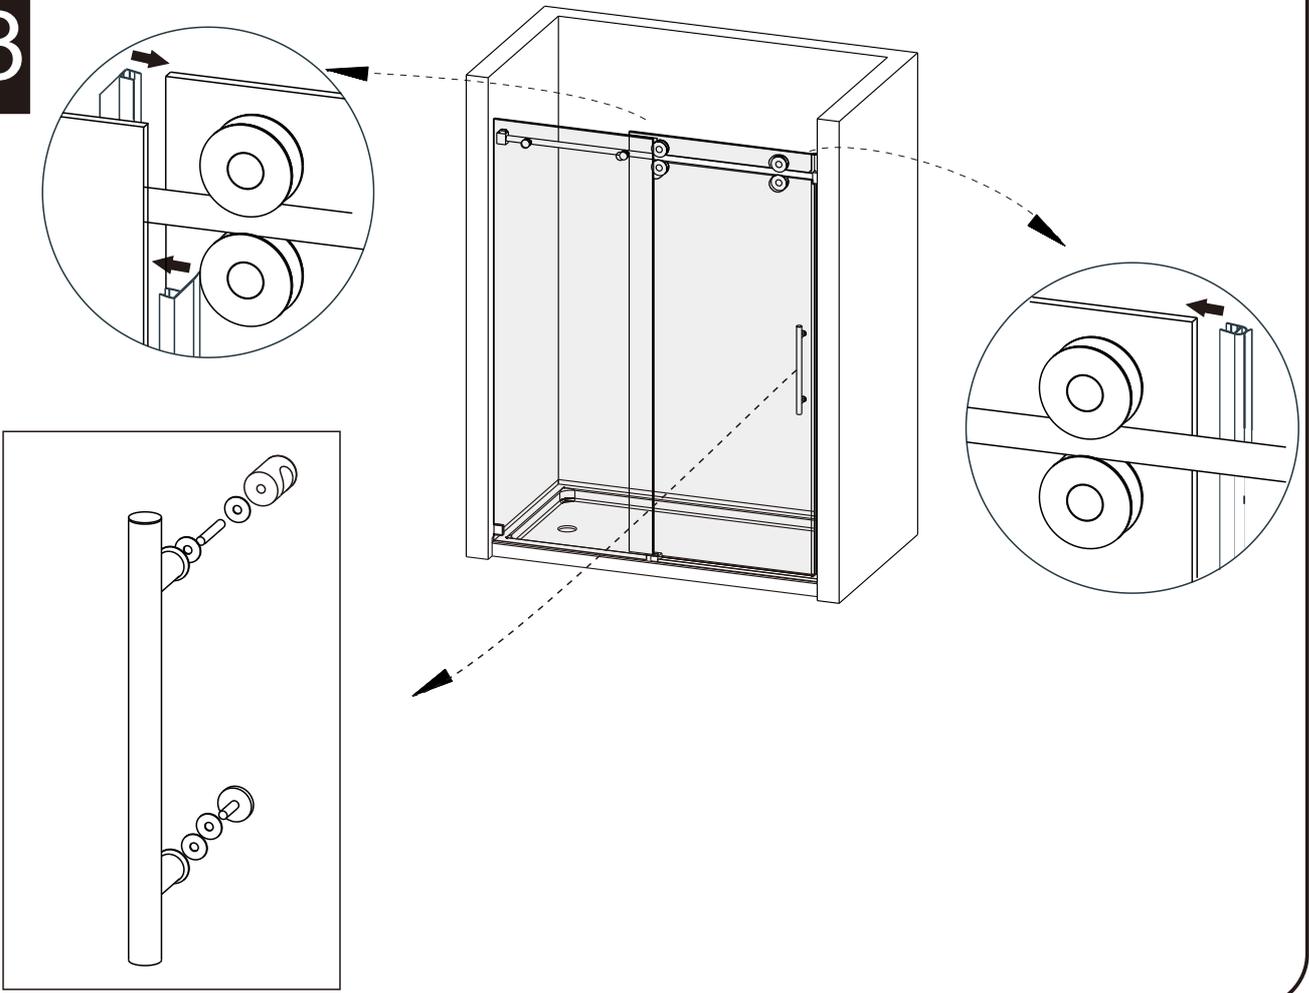

14

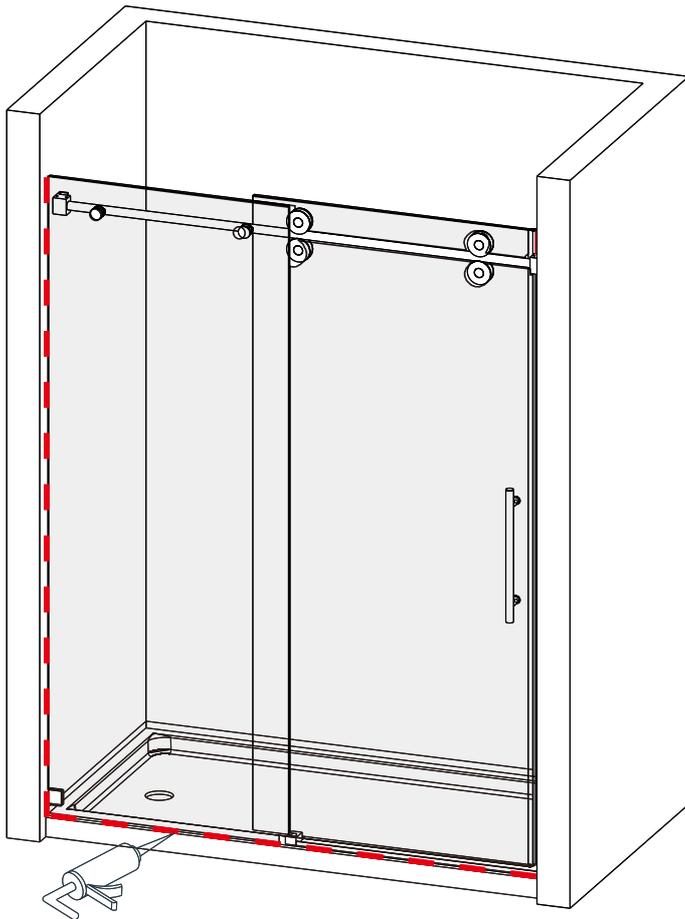

24 HOURS