INSTRUCTION MANUAL

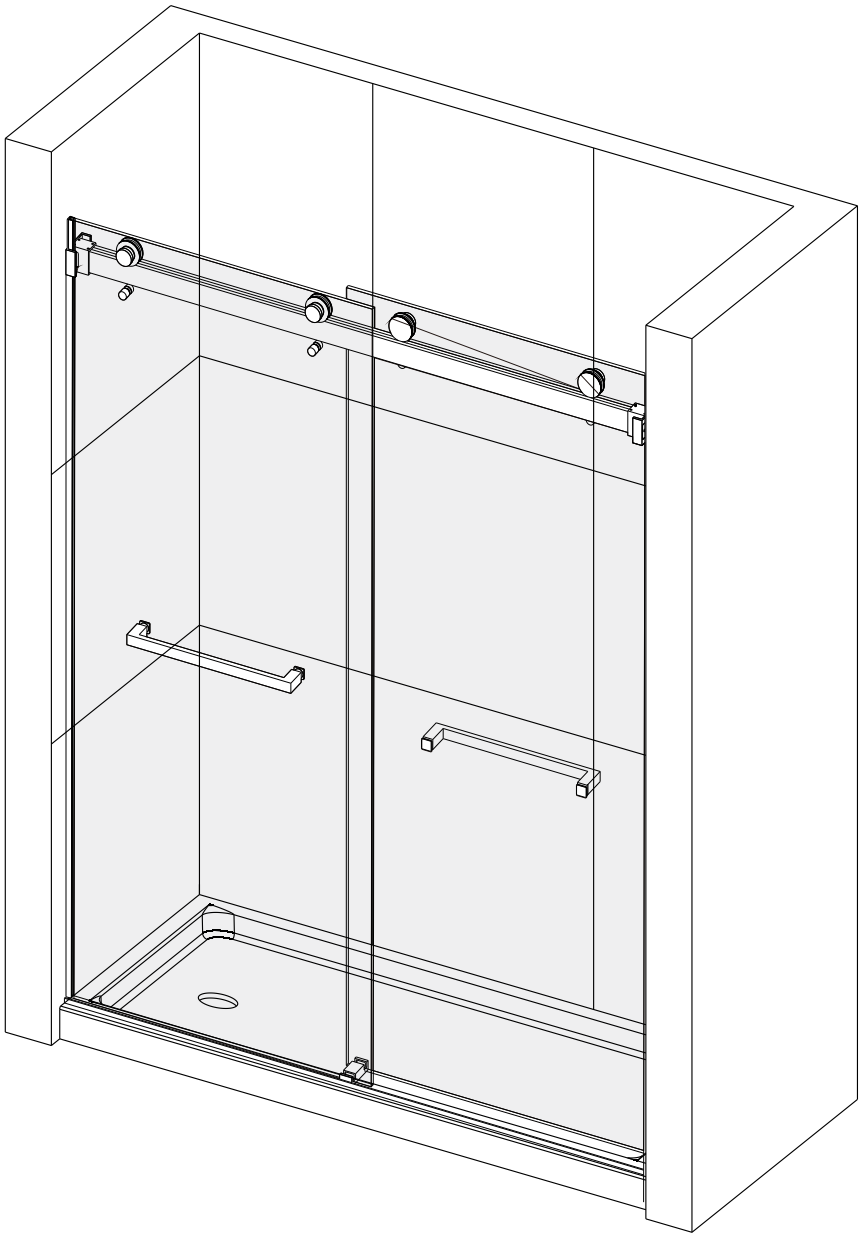

2 PEOPLE REQUIRED

Please keep this manual and product code number for future reference and for ordering replacement parts if necessary.

GENERAL INSTRUCTIONS

- Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

INSTALLATION OVER CERAMIC TILES

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.

NOTICE

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR

- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.

  An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and metal parts looking new.
- We recommend wiping the glass panels with a squeegee after each use.

Product specifications are subject to change without notice

TOOLS REQUIRED

 SPIRIT LEVEL	 POWER DRILL	 PENCIL	SILICONE	 MALLET
TAPE MEASURE	 SCREW DRIVER	 6mm&8mm(1/4" & 5/16") DRILL BITS	 HACKSAW	SAFETY GLASSES

* Use a 6mm(¼") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION

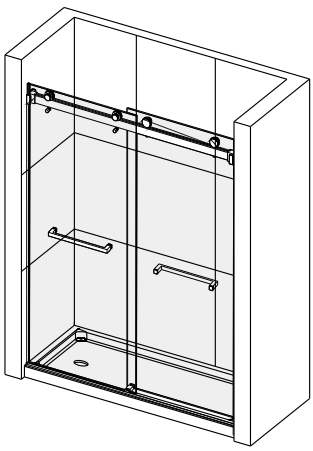

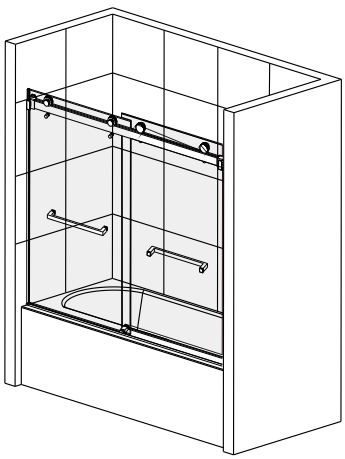

PARTS LISTING

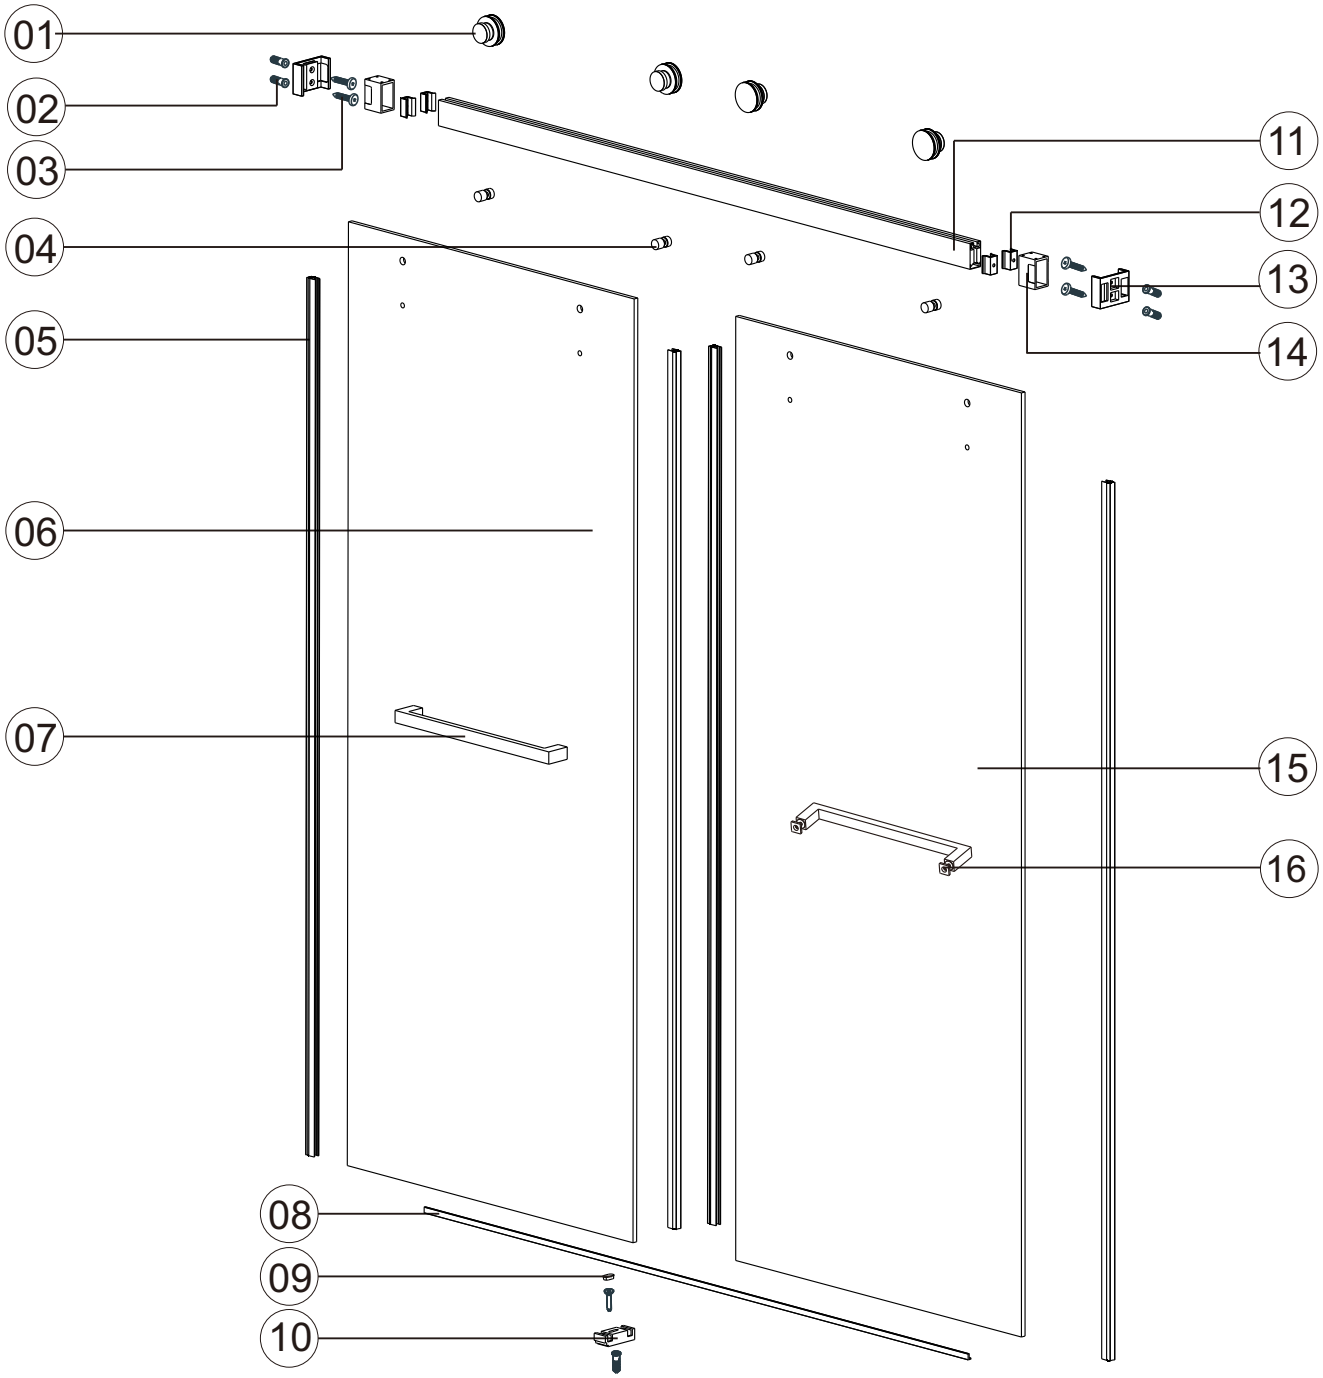

ITEM	PARTS	DIAGRAM	QTY
1	Roller		4
2	Wall plugs		5
3	Screw St4x30/St5x40		5
4	Anti jumping knob		4
5	Door seal		4
6	Sliding door		1
7	Towel bar		1
8	Anti-splash threshold		1
9	Floor guide cover cap		1

ITEM	PARTS	DIAGRAM	QTY
10	Floor guide		1
11	Rail		1
12	Anti-collision block		4
13	Wall mount bracket		2
14	Guide rail bracket		2
15	Sliding door		1
16	Towel bar		1

1

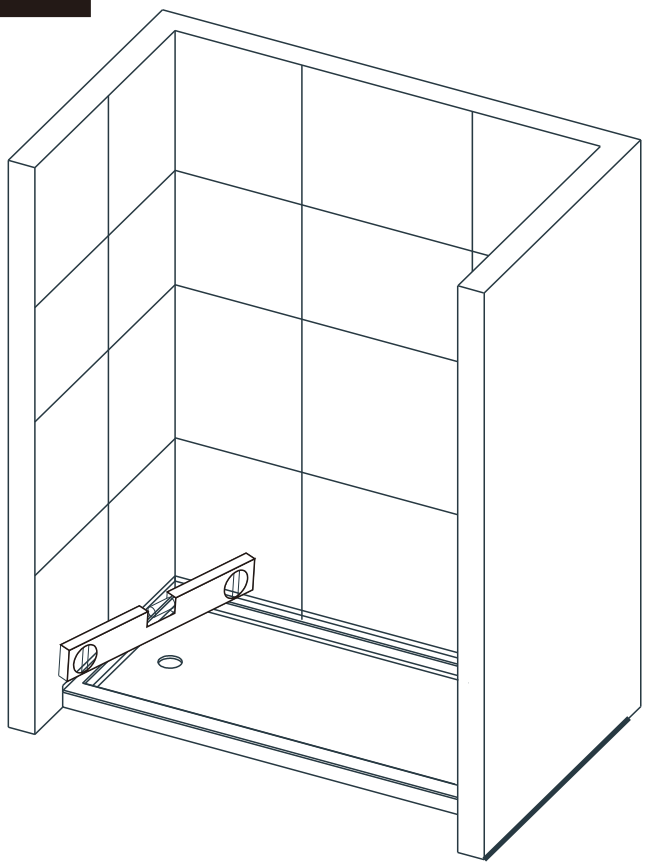

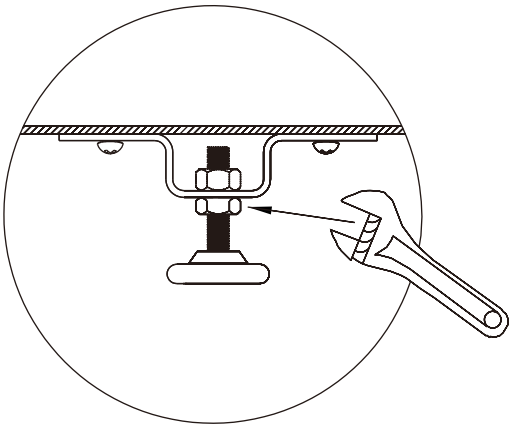

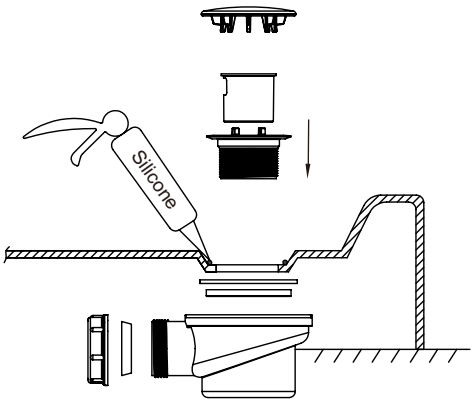

2

Product Height	A	B	C
60"(1524mm)	56 1/5"(1428mm)	7/8"(23mm)	1 1/2"(38mm)
66"(1676mm)	62 1/5"(1580mm)		
72"(1828mm)	68 1/5"(1732mm)		
75"(1905mm)	71 1/5"(1809mm)		
76"(1930mm)	72 1/5"(1834mm)		
78"(1981mm)	74 1/5"(1885mm)		
79"(2006mm)	75 1/5"(1910mm)		

*A=product height-3 4/5"(96mm)
*Without the size, please contact the local dealer.

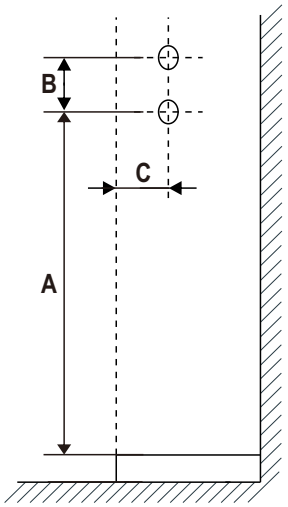



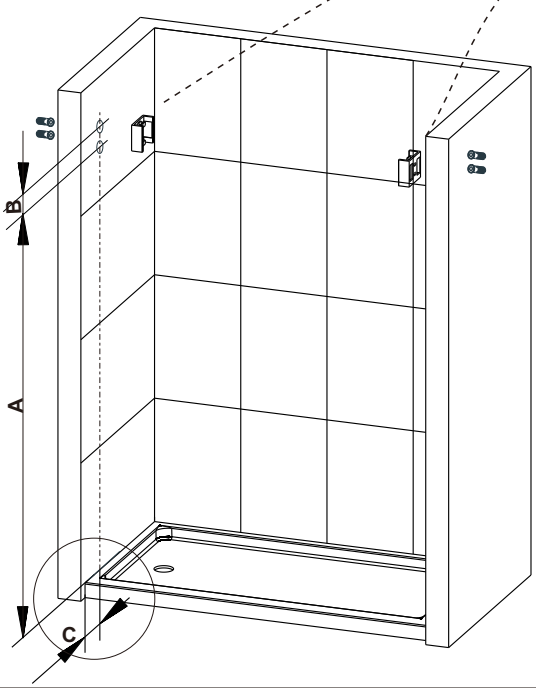

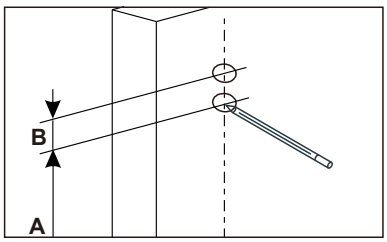

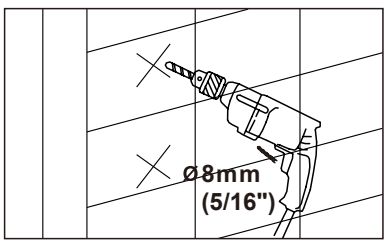

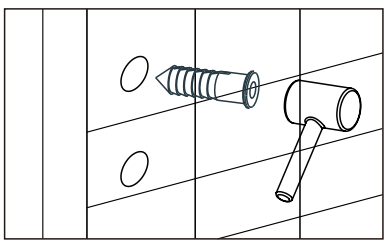

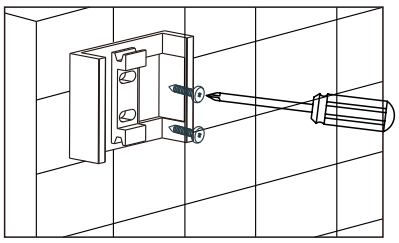

3

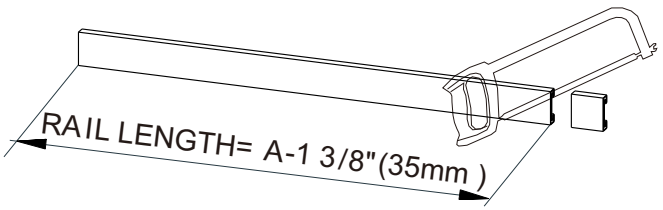

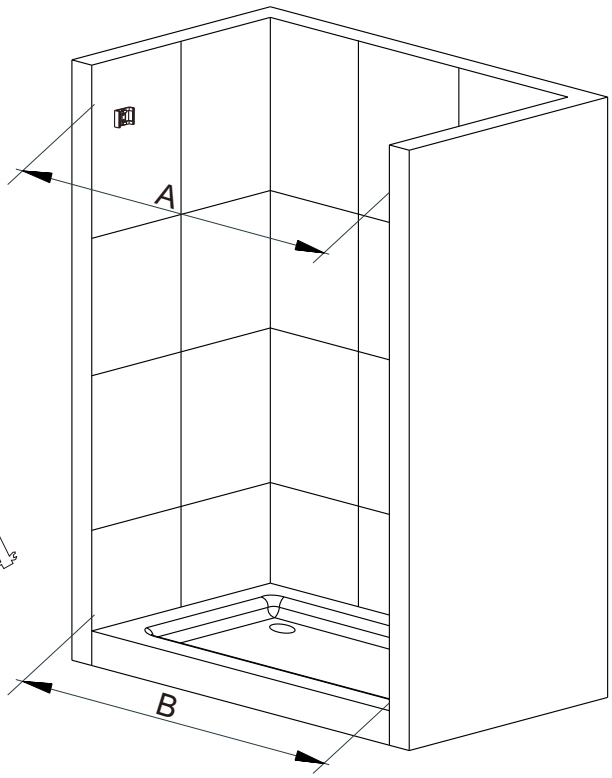

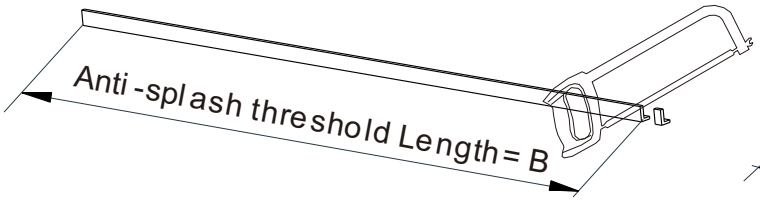

4

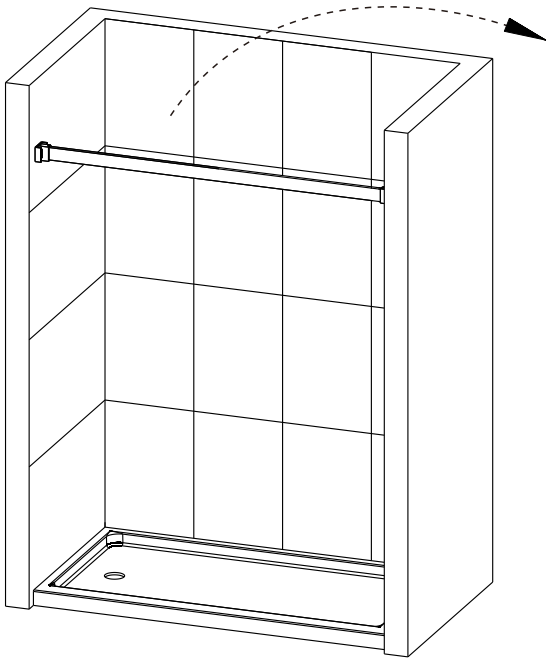

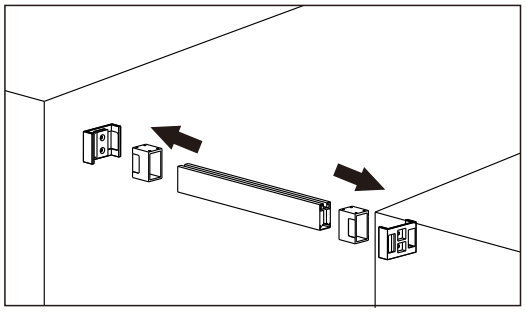

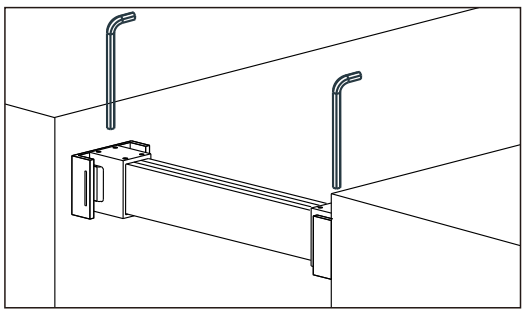

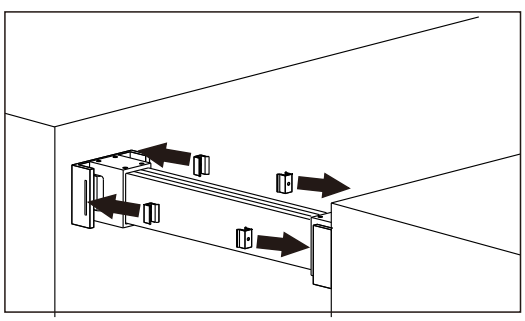

5







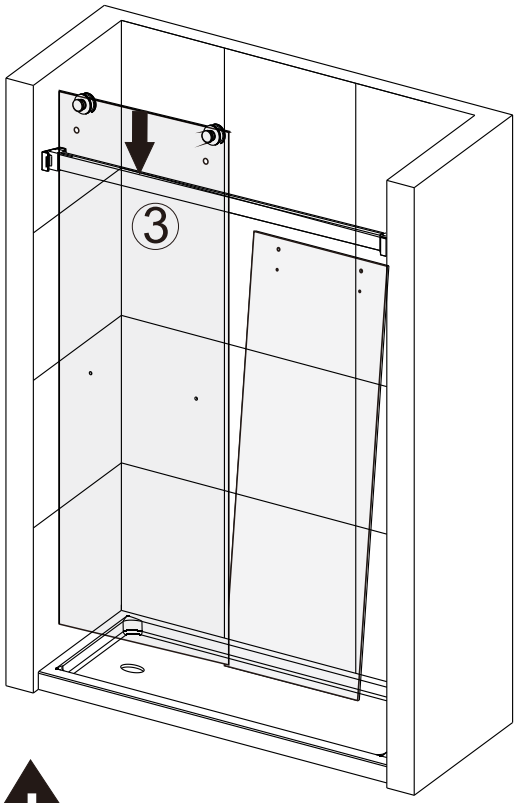

The glass side that treated with easy-cleaning should toward inside

6

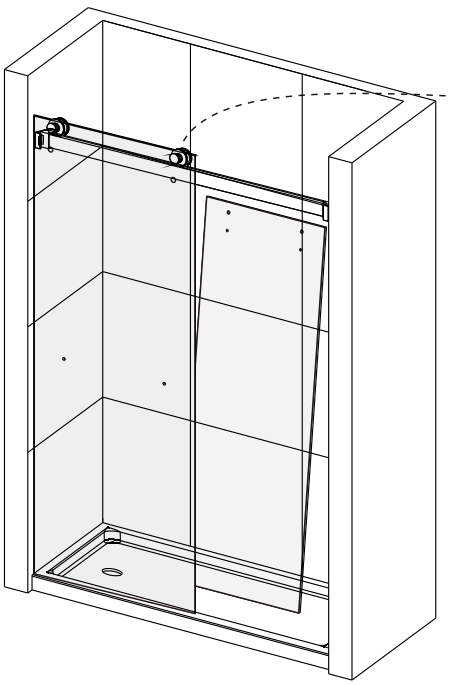



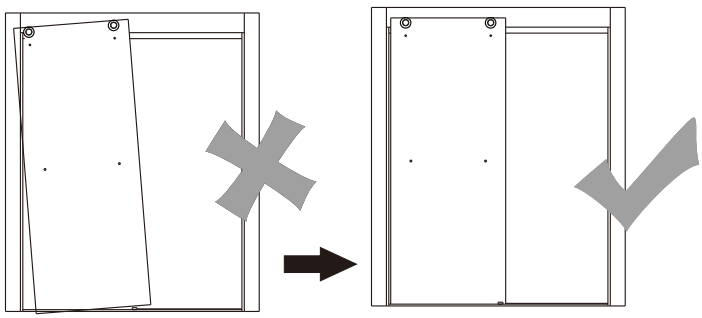

7

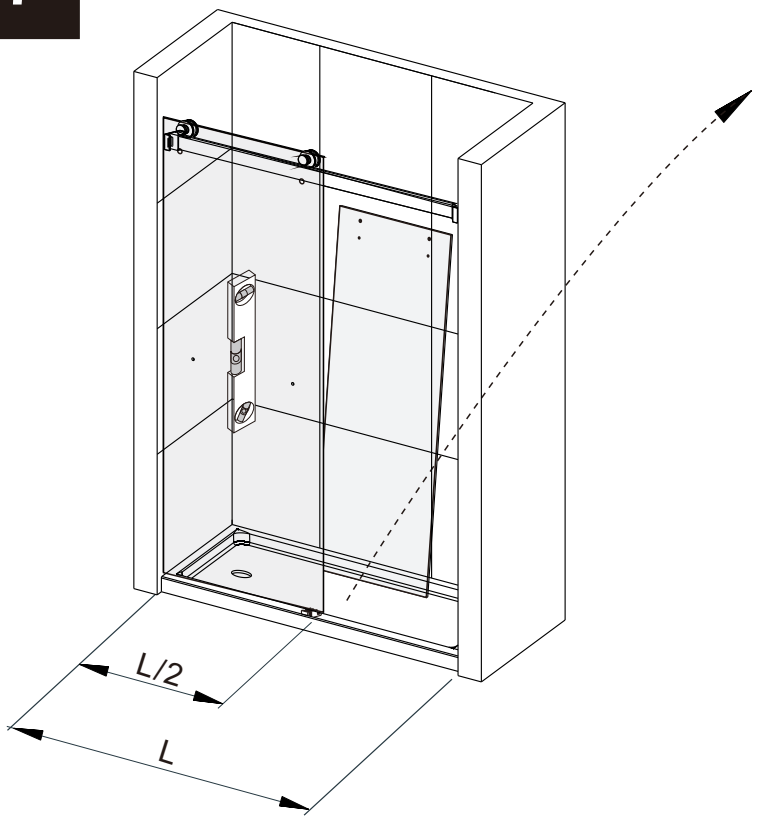

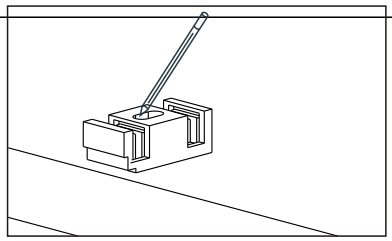

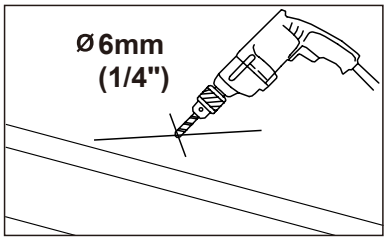

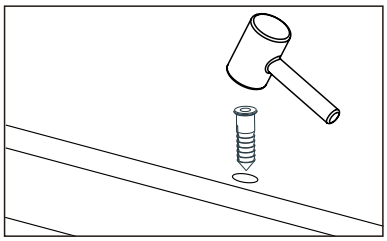

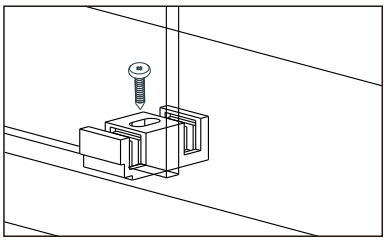

8

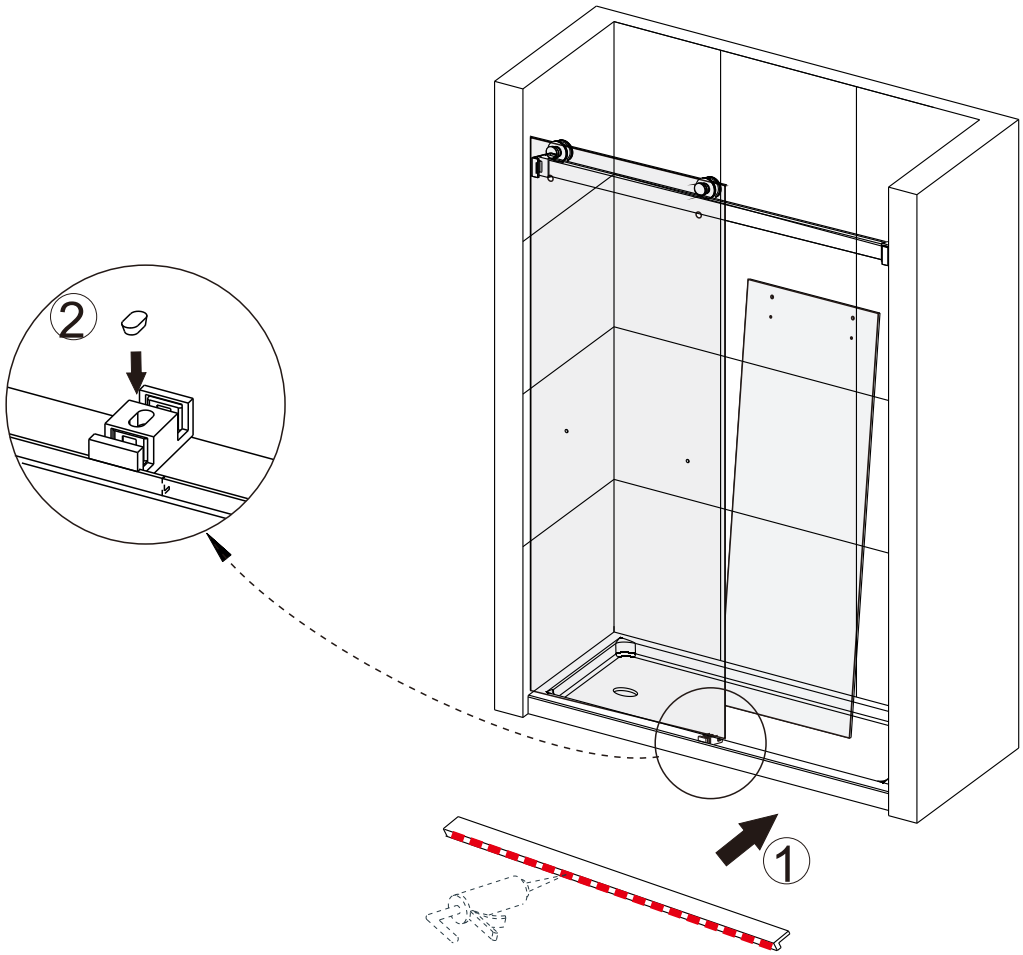

9







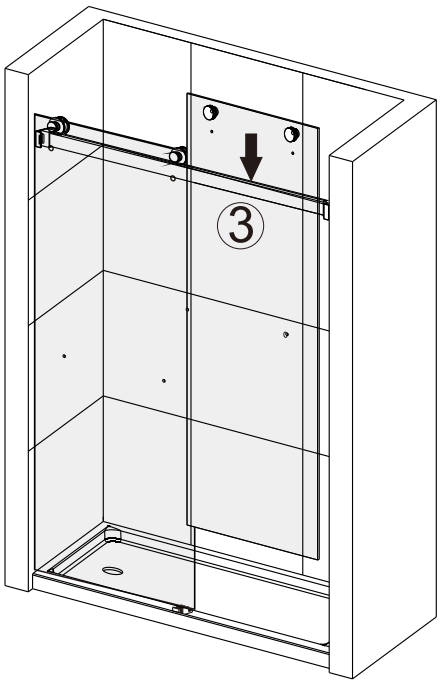

The glass side that treated with easy-cleaning should toward inside

10

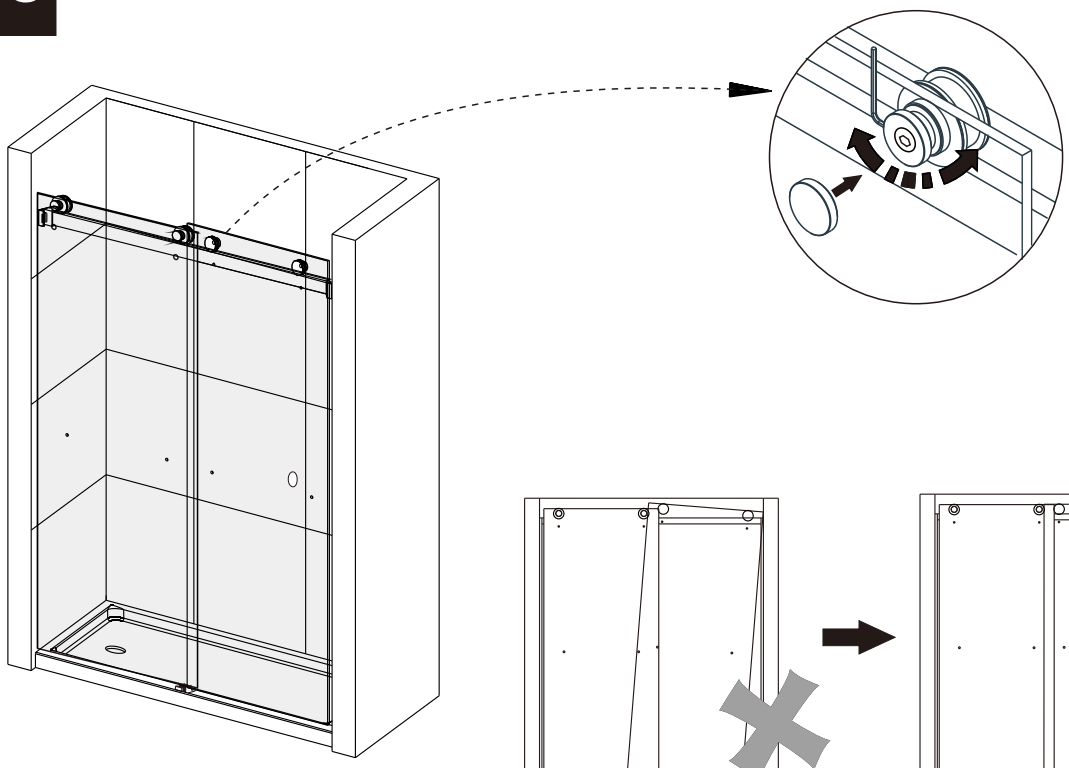

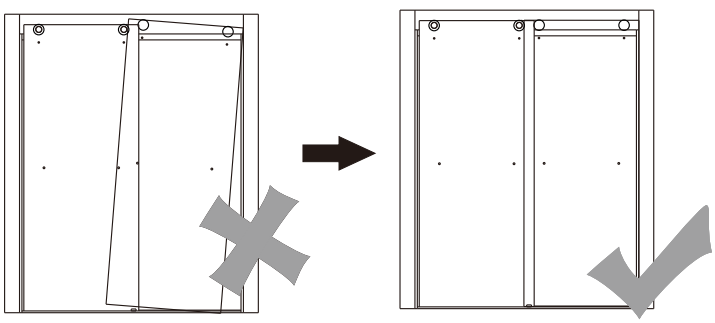

11

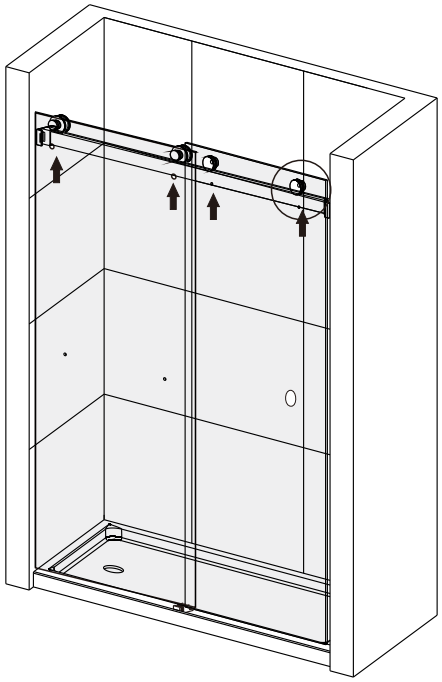

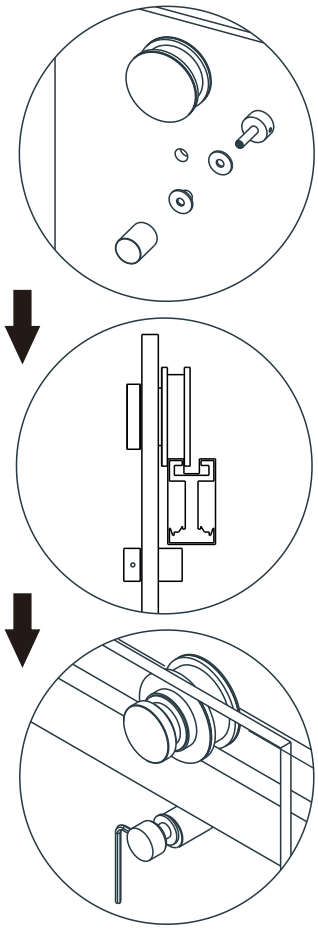

12

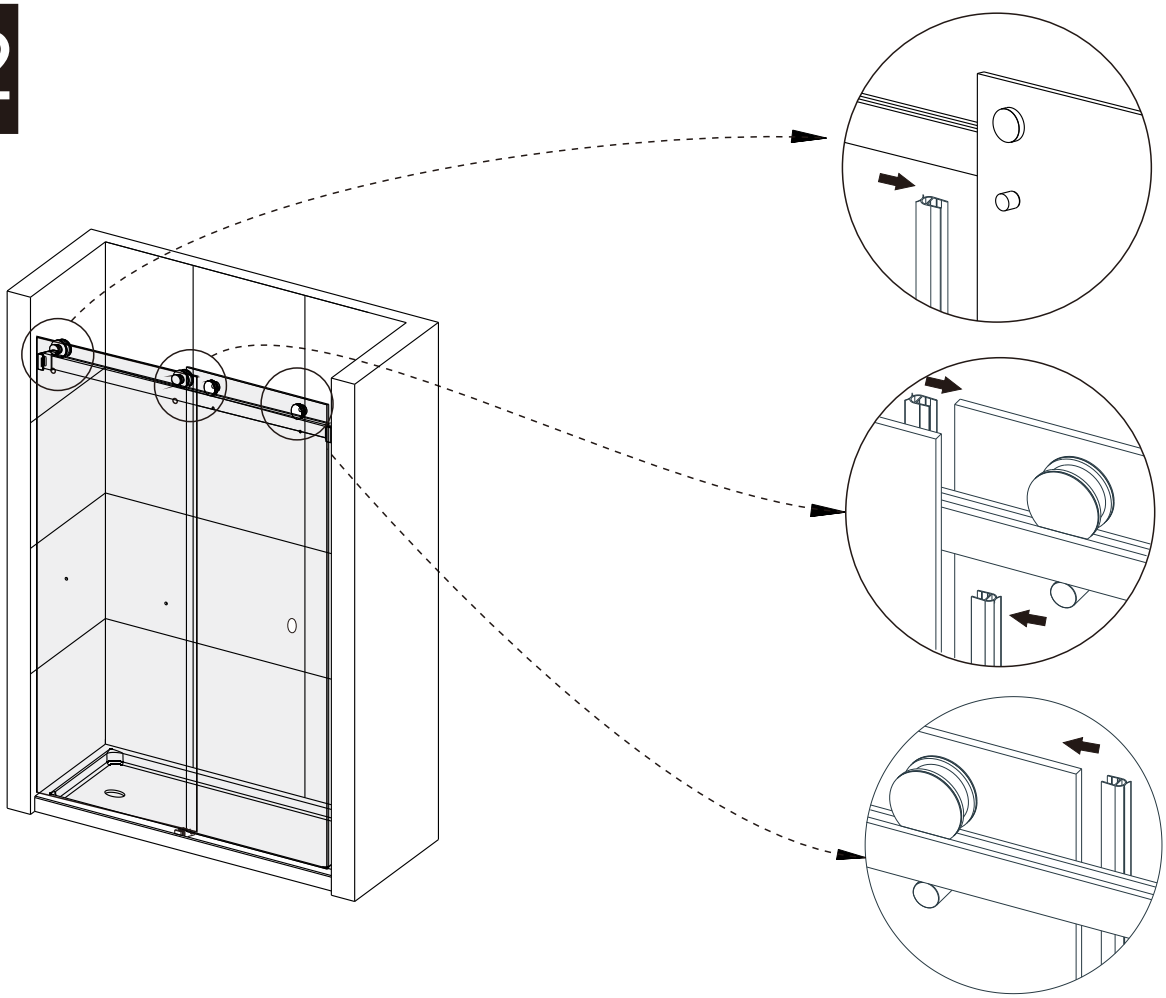

13

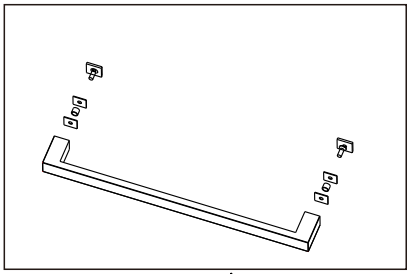

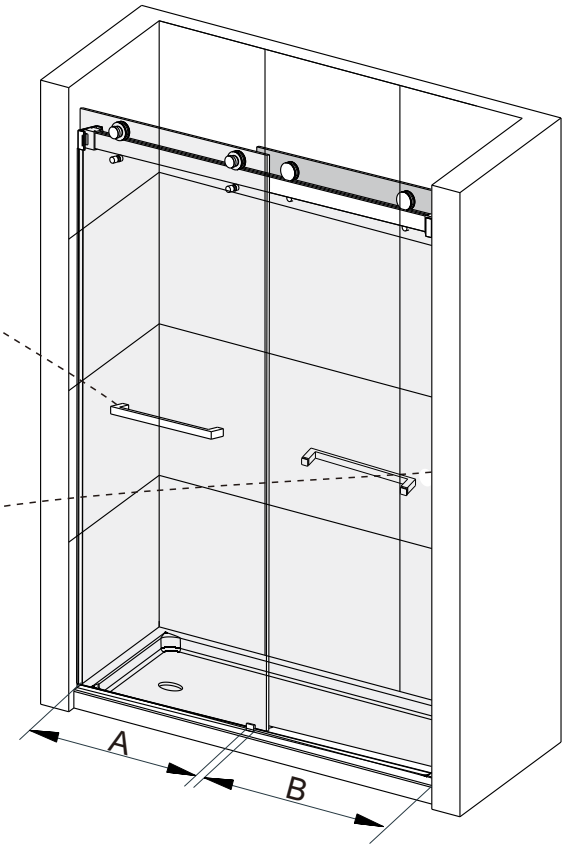

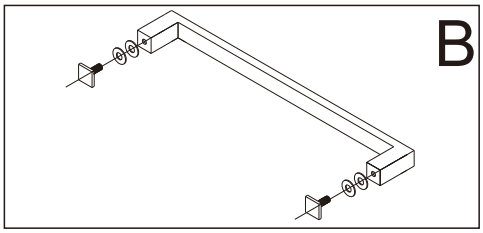

14

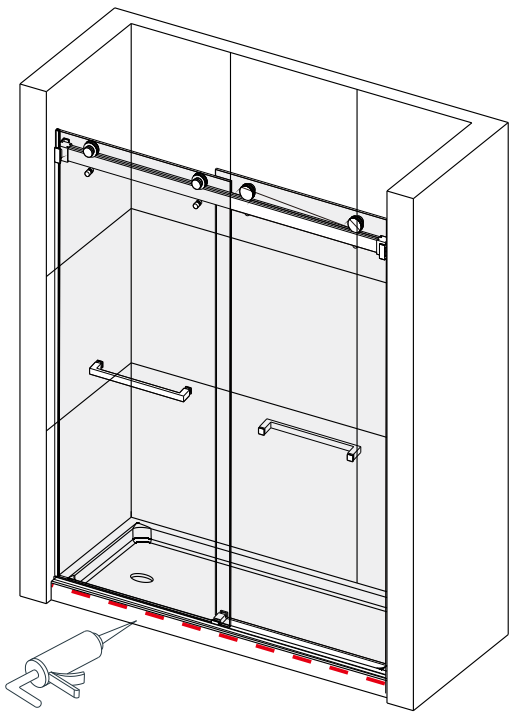



24 HOURS